

PRODUCT CATALOGUE

ROLLWELL
Trolley Wheel & Castors
MANUFACTURERS OF CASTOR & WHEELS

MECH
ENGINEERING CORPORATION
An ISO 9001 : 2015 Certified Company



SELECTION OF WHEELS

Important points while ordering castors and wheels

The life of the castor wheels depends on the following factors, to select correct load capacity, to select correct wheels suitable to the flooring, normal working temperature and local atmospheric conditions, noise levels, wear resistant, shock proof, resistant to chemical etc.

LOAD CAPACITY of castors and wheels

The following formula is generally used to calculation the wheel load capacity trolley/ frame, weight + load divided by three. This calculation is brought about by the fact that very often, because of uneven flooring condition, jerks, shock loads, difference in level on goods lift, rough and hard, sharp edges or steps only three wheels constantly rest on the ground. One of the wheel just idles. The other wheels are overloaded. Therefore Additional safety factors may be considered when calculating Loading capacity. To avoid castor failures due to overload consider the capacity of castor at 50% of normal capacity.

SWIVELING MOVEMENT AND SMOOTHNESS on operating the trolleys

Castor smoothness depends on load, wheel diameter, tyre, kind of hub, bearing, rollers or bushes and type of flooring. In addition to these factors, the fork swiveling movement also depends on ball diameter and rotation system, offset and type of bearings. As the diameter of wheel increases the push / pull effort are reduced.

NON MARKING on floorings

Nylon / CI wheels have always had the disadvantage of leaving dark trails on flooring. High-quality anti-static polyurethane wheels/ rubber bonded wheels that do not leave any trail on flooring both during the movement and while remaining stationary for long time. The pu and rubber wheel are soft in nature and have low noise level

BRAKING (locking)

Several brake devices are available to allow slope stopping, facilitate direction and lock the 4 wheels of the equipment individually or simultaneously in the desired place with a single movement.

Manufactured by : MECH ENGINEERING CORPORATION

H.O. : Old # 158, (New # 325), Linghi Chetty Street, Chennai - 600 001.

Vegetarian Village, Vadaperumbakkam, Red Hills, Chennai - 600 060.

Warehouse : # 55/56, 3rd Line North Beach Road, Chennai - 600 001.

☎ 044-4768 6161 | 📞 98846 55253 | 📞 97899 94650 | 📞 98400 65253

✉ sales@rollwellcastors.com | meco786@hotmail.com

🌐 www.rollwellcastors.com









Manufacturer reserve the right to change the design for continous development and improvement
All the load carrying capacity mentioned are in Kgs.











Press Steel Castor (Medium Duty) R- 50 SERIES

ROLLWELL
Trolley Wheel & Castors
MANUFACTURERS OF CASTOR & WHEELS



 Wheel Dia	 Tread Width	 Top Plate Size L x W	 Bolt Hole Spacing (Pitch)	 Overall Height	 Off Set	 Eye Size	 LCC
50	21	61x51	45x35	76	15	8x6	50
50	21	64x64	47x47	76	15	8x6	50
63	30	75x55	52x36	85	20	9x6	55
63	20	64x64	47x47	85	20	9x6	55
75	30	75x55	52x56	98	25	9x6	60
75	30	64x64	47x47	98	25	9x6	60
100	30	75x55	52x56	125	25	9x6	65
100	30	64x64	47x47	125	25	9x6	65
75	32	95x65	75x45	110	25	12x9	65
75	38	95x65	75x45	110	25	12x9	70
100	32	95x65	75x45	140	25	12x9	75



 Wheel Dia	 Tread Width	 Top Plate Size L x W	 Bolt Hole Spacing (Pitch)	 Overall Height	 Off Set	 Eye Size	 LCC
50	21	61X51	45X35	76	15	8X6	40
50	21	64X64	47X47	76	15	8X6	40
63	25	75X55	52X36	85	20	9X6	45
63	25	64X64	47X47	85	20	9X6	45
75	28	75X55	52X56	98	25	9X6	50
75	28	64X64	47X47	98	25	9X6	50
100	28	75X55	52X56	125	25	9X6	60
100	28	64X64	47X47	125	25	9X6	60
75	32	95x65	75x45	110	25	12x9	65
75	38	95x65	75x45	110	25	12x9	70
100	32	95x65	75x45	140	25	12x9	75

Manufactured by : **MECH ENGINEERING CORPORATION**

H.O. : Old # 158, (New # 325), Linghi Chetty Street, Chennai - 600 001.

Vegetarian Village, Vadaperumbakkam, Red Hills, Chennai - 600 060.

Warehouse : # 55/56, 3rd Line North Beach Road, Chennai - 600 001.

☎ 044-4768 6161 | 📞 98846 55253 | 📞 97899 94650 | 📞 98400 65253

✉ sales@rollwellcastors.com | meco786@hotmail.com



🌐 www.rollwellcastsors.com

















Manufacturer reserve the right to change the design for continous development and improvement
All the load carrying capacity mentioned are in Kgs.

















MECH
ENGINEERING CORPORATION
An ISO 9001 : 2015 Certified Company

Press Steel Castor (Light Duty) R-100 SERIES

									
	Wheel Dia	Tread Width	Top Plate Size L x W	Bolt Hole Spacing (Pitch)	Eye Size	Overall Height	Fixed Bolt Plate Spacing Pitch	Fixed Top Plate Size L x W	LCC
	40 (1.5")	20 mm	60x43 mm	45x30mm	6.5mm	60 mm	60x43 mm	45x30mm	40 kg
	50 (2")	25 mm	71x50 mm	50x30mm	8.5mm	72 mm	71x50 mm	50x30mm	50 kg
	63 (2.5")	32 mm	94x62 mm	74x45mm	8.5mm	93 mm	94x62 mm	74x45mm	100 kg
	75 (3")	32 mm	94x62 mm	74x45mm	8.5mm	103 mm	94x62 mm	74x45mm	110 kg
	100 (4")	32 mm	94x62 mm	74x45mm	8.5mm	126 mm	94x62 mm	74x45mm	120 kg
	125 (5")	32 mm	94x62 mm	74x45mm	8.5mm	155 mm	94x62 mm	74x45mm	130 kg

									
	Wheel Dia	Tread Width	Top Plate Size L x W	Bolt Hole Spacing (Pitch)	Eye Size	Overall Height	Fixed Top Plate LxW	Fixed Bolt Plate Spacing Pitch	LCC
	40 mm	20 mm	60x43 mm	45x30mm	8.5mm	60 mm	60x43mm	45x30mm	50 kg
	50 mm	24 mm	70x51 mm	53x35mm	8.5mm	73 mm	70x51mm	53x35mm	70 kg
	63 mm	32 mm	92x65 mm	73x45mm	8.5mm	88 mm	92x65mm	73x45mm	80 kg
	75 mm	32 mm	92x65 mm	73x45mm	8.5mm	108 mm	92x65mm	73x45mm	100 kg
	100 mm	32 mm	93x62 mm	45x72mm	8.5mm	130 mm	93x62mm	45x72mm	125 kg
	125 mm	32 mm	93x62 mm	45x72mm	8.5mm	155 mm	93x62mm	45x72mm	150 kg

									
	Wheel Dia	Tread Width	Top Plate Size L x W	Bolt Hole Spacing (Pitch)	Eye Size	Overall Height	Fixed Top Plate Size L x W	Fixed Bolt Plate Spacing Pitch	LCC
	40 (1.5")	22 mm	60x43	45x30	8.5 mm	60	-	-	35
	50 (2")	25 mm	70x51	53x35	8.5 mm	73	-	-	50
	63 (2.5")	30 mm	93x62	74x45	8.5 mm	98	-	-	70
	75 (3")	30 mm	93x62	72x45	8.5 mm	105	93x62	72x45	90
	100 (4")	30 mm	93x62	72x45	8.5 mm	130	93x62	72x45	80
	125 (5")	30 mm	93x62	72x45	8.5 mm	155	93x62	72x45	100

Assembled by : MECH ENGINEERING CORPORATION

H.O. : Old # 158, (New # 325), Linghi Chetty Street, Chennai - 600 001.

Vegetarian Village, Vadaperumbakkam, Red Hills, Chennai - 600 060.

Warehouse : # 55/56, 3rd Line North Beach Road, Chennai - 600 001.

☎ 044-4768 6161 | 📞 98846 55253 | 📞 97899 94650 | 📞 98400 65253

✉ sales@rollwellcastors.com | meco786@hotmail.com

🌐 www.rollwellcastors.com


Manufacturer reserve the right to change the design for continuous development and improvement
All the load carrying capacity mentioned are in Kgs.

Press Steel Castor (Medium Duty) R-200 SERIES

ROLLWELL
Trolley Wheel & Castors
MANUFACTURERS OF CASTOR & WHEELS



 Wheel Dia	 Tread Width	 Top Plate Size L x W	 Bolt Hole Spacing (Pitch)	 Overall Height	 Off Set	 Eye Size	 Fixed Top Plate Size L x W	 Fixed Bolt Plate Spacing Pitch
100	40	95x95	70x70	135	35	16x10	115x80	85x50
100	50	95x95	70x70	135	35	16x10	115x80	85x50
125	40	120x95	90x70	160	40	16x10	125x105	90x65
125	50	120x95	90x70	160	40	16x10	125x105	90x65
150	50	120x95	90x70	185	40	16x10	115x80	90x55
200	50	120x95	90x70	235	40	16x10	115x80	85x55

	Size	LCC		Size	LCC		Size	LCC		Size	LCC
	Red NY PVC	100x40		85	WHITE NYLON 'E'		100x40	-		ORANGE ANTI SKID	100x40
	100x50	90		100x50	85		100x50	100		100x50	90
	125x40	100		125x40	-		125x40	-		125x40	-
	125x50	110		125x50	-		125x50	-		125x50	-
	150x50	125		150x50	120		150x50	125		150x50	125
	200x50	150		200x50	140		200x50	150		200x50	150

	Size	LCC		Size	LCC		Size	LCC		Size	LCC
	BLACK SOLID UHMW	100x40		-	NYLON BUSH		100x40	60		WHITE SOLID NYLON	100x40
	100x50	100		100x50	70		100x50	100		100x50	85
	125x40	-		125x40	-		125x40	100		125x40	-
	125x50	125		125x50	80		125x50	110		125x50	110
	150x50	150		150x50	90		150x50	125		150x50	125
	200x50	175		200x50	100		200x50	150		200x50	150

	Size	LCC		Size	LCC		Size	LCC		Size	LCC
	FOAM RUBBER WHEEL	100x40		-	PLASTIC CORE RUBBER		100x40	-		SOLID RUBBER GI RIM	100x40
	100x50	80		100x50	90		100x50	90		100x50	100
	125x40	-		125x40	-		125x40	100		125x40	-
	125x50	100		125x50	110		125x50	110		125x50	-
	150x50	120		150x50	125		150x50	125		150x50	125
	200x50	135		200x50	150		200x50	150		200x50	150

Manufactured by : **MECH ENGINEERING CORPORATION**

H.O. : Old # 158, (New # 325), Linghi Chetty Street, Chennai - 600 001.

Vegetarian Village, Vadaperumbakkam, Red Hills, Chennai - 600 060.

Warehouse : # 55/56, 3rd Line North Beach Road, Chennai - 600 001.

☎ 044-4768 6161 | 📞 98846 55253 | 📞 97899 94650 | 📞 98400 65253

✉ sales@rollwellcastors.com | meco786@hotmail.com

🌐 www.rollwellcastors.com

Manufacturer reserve the right to change the design for continuous development and improvement
All the load carrying capacity mentioned are in Kgs.



MECH
ENGINEERING CORPORATION
An ISO 9001 : 2015 Certified Company

Press Steel Castor (Medium Duty) R- 300 SERIES

ROLLWELL
Trolley Wheel & Castors
MANUFACTURERS OF CASTOR & WHEELS




Wheel Dia	Tread Width	Top Plate Size L x W	Bolt Hole Spacing (Pitch)	Overall Height	Off Set	Eye Size	Fixed Top Plate Size L x W	Fixed Bolt Plate Spacing Pitch
100 (4")	40 (1½")	95x95	70x70	130	45	16x10	100x100	70x70
100 (4")	50 (2")	95x95	70x70	130	45	16x10	100x100	70x70
150 (6")	50 (2")	120x195	95x70	185	50	16x10	110x75	90x55
200 (8")	50 (2")	120x195	95x70	235	50	16x10	110x75	95x65

Red NY PVC	Size	LCC	WHITE NYLON 'E'	Size	LCC	WHITE SOLID NYLON	Size	LCC	ORANGE ANTI SKID	Size	LCC
	100x40	90 kgs		100x40	80 kgs		100x40	150 kgs		100x40	125 kgs
	100x50	100 kgs		100x50	90 kgs		100x50	200 kgs		100x50	150 kgs
	150x50	150 kgs		150x50	125 kgs		150x50	250 kgs		150x50	200 kgs
	200x50	200 kgs		200x50	150 kgs		200x50	300 kgs		200x50	250 kgs

BLACK SOLID UHMW	Size	LCC	BLACK HDP	Size	LCC	NYLON FAN	Size	LCC	NYLON IVORY	Size	LCC
	100x40	200 kgs		100x40	-		100x40	-		100x40	125 kgs
	100x50	225 kgs		100x50	-		100x50	100 kgs		100x50	150 kgs
	150x50	300 kgs		150x50	125 kgs		150x50	150 kgs		150x50	200 kgs
	200x50	350 kgs		200x50	150 kgs		200x50	200 kgs		200x50	250 kgs

SOLID RUBBER GI RIM	Size	LCC	RUBBER BONDED CI	Size	LCC	PHENOLIC FIBRE	Size	LCC	GREY FORM RUBBER	Size	LCC
	100x40	100 kgs		100x40	125 kgs		100x40	175 kgs		100x40	200 kgs
	100x50	125 kgs		100x50	150 kgs		100x50	210 kgs		100x50	225 kgs
	150x50	150 kgs		150x50	200 kgs		150x50	275 kgs		150x50	300 kgs
	200x50	200 kgs		200x50	250 kgs		200x50	325 kgs		200x50	350 kgs

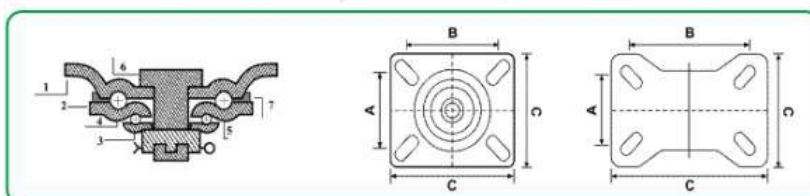

COLOUR OPTION : ZINC / BLACK / IVORY / GOLDEN



Manufactured by : **MECH ENGINEERING CORPORATION**

H.O. : Old # 158, (New # 325), Linghi Chetty Street, Chennai - 600 001.

Vegetarian Village, Vadaperumbakkam, Red Hills, Chennai - 600 060.

Warehouse : # 55/56, 3rd Line North Beach Road, Chennai - 600 001.

☎ 044-4768 6161 | 📞 98846 55253 | 📞 97899 94650 | 📞 98400 65253

✉ sales@rollwellcastors.com | meco786@hotmail.com

🌐 www.rollwellcastors.com

Manufacturer reserve the right to change the design for continous development and improvement
All the load carrying capacity mentioned are in Kgs.



MECH
ENGINEERING CORPORATION
An ISO 9001 : 2015 Certified Company

Press Steel Castor (Heavy Duty) R- 400 SERIES

ROLLWELL
Trolley Wheel & Castors
MANUFACTURERS OF CASTOR & WHEELS





Wheel Dia	Tread Width	Top Plate Size L x W	Bolt Hole Spacing (Pitch)	Overall Height	Off Set	Eye Size	Fixed Top Plate Size L x W	Fixed Bolt Plate Spacing Pitch
100 (4")	50 (2")	130x115 mm	104x77 mm	150	40	14x10	140x90	100x55
150 (6")	50 (2")	130x115 mm	104x77 mm	200	50	14x10	140x90	100x55
200 (8")	50 (2")	130x115 mm	104x77 mm	235	55	14x10	140x90	100x55

Red NY PVC	Size	LCC	WHITE NYLON 'E'	Size	LCC	WHITE SOLID NYLON	Size	LCC	ORANGE ANTI SKID	Size	LCC
	100x50	200 kgs		100x50	250 kgs		100x50	300 kgs		100x50	150 kgs
	150x50	250 kgs		150x50	300 kgs		150x50	350 kgs		150x50	200 kgs
	200x50	300 kgs		200x50	350 kgs		200x50	400 kgs		200x50	250 kgs

BLACK SOLID UHMW	Size	LCC	CI CORE POLYURETHANE	Size	LCC	WHITE NYLON FAN	Size	LCC	IVORY NYLON	Size	LCC
	100x50	300 kgs		100x50	150 kgs		100x50	200 kgs		100x50	250 kgs
	150x50	500 kgs		150x50	200 kgs		150x50	225 kgs		150x50	350 kgs
	200x50	600 kgs		200x50	250 kgs		200x50	275 kgs		200x50	450 kgs

SOLID RUBBER GI RIM	Size	LCC	RUBBER BONDED CI	Size	LCC	CI PU RED	Size	LCC	CASTING TAPPER	Size	LCC
	100x50	150 kgs		100x50	200 kgs		100x50	250 kgs		100x50	350 kgs
	150x50	200 kgs		150x50	250 kgs		150x50	300 kgs		150x50	500 kgs
	200x50	250 kgs		200x50	300 kgs		200x50	400 kgs		200x50	600 kgs

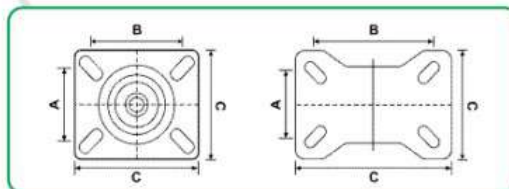

COLOUR OPTION :
ZINC / BLACK / IVORY / GOLDEN / MILITARY GREEN



Manufactured by : **MECH ENGINEERING CORPORATION**

H.O. : Old # 158, (New # 325), Linghi Chetty Street, Chennai - 600 001.

Vegetarian Village, Vadaperumbakkam, Red Hills, Chennai - 600 060.

Warehouse : # 55/56, 3rd Line North Beach Road, Chennai - 600 001.

☎ 044-4768 6161 | 📞 98846 55253 | 📞 97899 94650 | 📞 98400 65253

✉ sales@rollwellcastors.com | meco786@hotmail.com

🌐 www.rollwellcastors.com

Manufacturer reserve the right to change the design for continuous development and improvement
All the load carrying capacity mentioned are in Kgs.



MECH
ENGINEERING CORPORATION
An ISO 9001 : 2015 Certified Company

SS CASTOR 304 GRADE R-450 SERIES

ROLLWELL
Trolley Wheel & Castors
MANUFACTURERS OF CASTOR & WHEELS



Wheel Dia	Tread Width	Top Plate Size L x W	Bolt Hole Spacing (Pitch)	Overall Height	Eye Size	Fixed Top Plate Size L x W	Fixed Bolt Plate Spacing Pitch	LCC
50	25	75x50	60x30	90	6	75x50	60x30	50
63	25	75x65	54x43	95	6	75x65	54x43	63
75	25	75x65	54x43	105	6	75x65	54x43	75
75	32	75x75	55x55	115	9	75x75	55x55	75
100	32	75x75	55x55	145	9	75x75	55x55	100
100	38	100x80	80x60	145	10	100x80	80x60	100
100	50	100x100	75x75	145	12	100x100	75x75	100
125	32	100x80	80x60	170	10	100x80	80x60	125
125	38	100x80	80x60	170	10	100x80	80x60	125
150	50	125x100	100x75	170	12	125x100	100x75	150
200	50	125x100	100x75	210	12	125x100	100x75	200
250	50	125x125	100x100	255	12	125x125	100x100	

SS CASTOR 304 GRADE TWIN WHEEL



Wheel Dia	Tread Width	Top Plate Size L x W	Bolt Hole Spacing (Pitch)	Overall Height	Eye Size	Fixed Top Plate Size L x W	Fixed Bolt Plate Spacing Pitch	LCC
50	25	75x50	60x30	90	6	75x50	60x30	100
63	25	75x65	54x43	95	6	75x65	54x43	125
75	25	75x65	54x43	105	6	75x65	54x43	135
75	32	75x75	55x55	115	9	75x75	55x55	150
100	32	75x75	55x55	145	9	75x75	55x55	175
100	38	100x80	80x60	145	10	100x80	80x60	200
100	50	100x100	75x75	145	12	100x100	75x75	250
125	32	100x80	80x60	170	10	100x80	80x60	225
125	38	100x80	80x60	170	10	100x80	80x60	250
150	50	125x100	100x75	170	12	125x100	100x75	300
200	50	125x100	100x75	210	12	125x100	100x75	350
250	50	125x125	100x100	255	12	125x125	100x100	400

Manufactured by : **MECH ENGINEERING CORPORATION**

H.O. : Old # 158, (New # 325), Linghi Chetty Street, Chennai - 600 001.

Vegetarian Village, Vadaperumbakkam, Red Hills, Chennai - 600 060.

Warehouse : # 55/56, 3rd Line North Beach Road, Chennai - 600 001.

☎ 044-4768 6161 | 📞 98846 55253 | 📞 97899 94650 | 📞 98400 65253

✉ sales@rollwellcastors.com | meco786@hotmail.com

🌐 www.rollwellcastors.com

Manufacturer reserve the right to change the design for continuous development and improvement
All the load carrying capacity mentioned are in Kgs.



MECH
ENGINEERING CORPORATION
An ISO 9001 : 2015 Certified Company

Steel Castor Fabricated (Medium Duty) R- 500 SERIES

ROLLWELL
Trolley Wheel & Castors
MANUFACTURERS OF CASTOR & WHEELS




Wheel Dia	Tread Width	Top Plate Size L x W	Bolt Hole Spacing (Pitch)	Overall Height	Off Set	Eye Size	Fixed Top Plate Size L x W	Fixed Bolt Plate Spacing Pitch
100 (4")	50 (2")	115x100	85x70	145	45	20x11	115x100	85x70
125 (5")	50 (2")	115x100	85x70	165	45	20x11	115x100	85x70
150 (6")	50 (2")	115x100	85x70	190	50	20x11	115x100	85x70
200 (8")	50 (2")	115x100	85x70	250	55	20x11	115x100	85x70

Red NY PVC	Size	LCC	WHITE NYLON 'E'	Size	LCC	ORANGE ANTI SKID	Size	LCC	NYLON FAN	Size	LCC
	100x50	200 kgs		100x50	200 kgs		100x50	225 kgs		100x50	275 kgs
	125x50	225 kgs		125x50	225 kgs		125x50	250 kgs		125x50	300 kgs
	150x50	250 kgs		150x50	250 kgs		150x50	275 kgs		150x50	400 kgs
	200x50	275 kgs		200x50	275 kgs		200x50	300 kgs		200x50	450 kgs

WHITE SOLID NYLON	Size	LCC	BLACK SOLID UHMW	Size	LCC	FOAM RUBBER WHEEL	Size	LCC	NYLON IVORY	Size	LCC
	100x50	300 kgs		100x50	300 kgs		100x50	225 kgs		100x50	250 kgs
	125x50	325 kgs		125x50	350 kgs		125x50	250 kgs		125x50	275 kgs
	150x50	350 kgs		150x50	400 kgs		150x50	275 kgs		150x50	350 kgs
	200x50	400 kgs		200x50	500 kgs		200x50	300 kgs		200x50	375 kgs

RUBBER BONDED CI	Size	LCC	CI CORE POLYURATHANE	Size	LCC	CI PU RED	Size	LCC	CASTING	Size	LCC
	100x50	175 kgs		100x50	225 kgs		100x50	250 kgs		100x50	300 kgs
	125x50	200 kgs		125x50	250 kgs		125x50	275 kgs		125x50	325 kgs
	150x50	225 kgs		150x50	275 kgs		150x50	350 kgs		150x50	450 kgs
	200x50	250 kgs		200x50	300 kgs		200x50	375 kgs		200x50	500 kgs

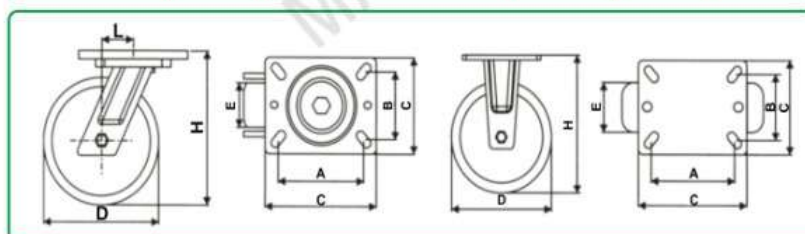

COLOUR OPTION : ZINC / BLACK / IVORY / GOLDEN



Manufactured by : **MECH ENGINEERING CORPORATION**

H.O. : Old # 158, (New # 325), Linghi Chetty Street, Chennai - 600 001.

Vegetarian Village, Vadaperumbakkam, Red Hills, Chennai - 600 060.

Warehouse : # 55/56, 3rd Line North Beach Road, Chennai - 600 001.

☎ 044-4768 6161 | 📞 98846 55253 | 📞 97899 94650 | 📞 98400 65253

✉ sales@rollwellcastors.com | meco786@hotmail.com

🌐 www.rollwellcastors.com

Manufacturer reserve the right to change the design for continuous development and improvement
All the load carrying capacity mentioned are in Kgs.











MECH
ENGINEERING CORPORATION
An ISO 9001 : 2015 Certified Company



Heavy Duty Forged Steel Castor R- 800 SERIES

ROLLWELL
Trolley Wheel & Castors
MANUFACTURERS OF CASTOR & WHEELS



 Wheel Dia	 Tread Width	 Top Plate Size L x W	 Bolt Hole Spacing (Pitch)	 Overall Height	 Off Set	 Fixed Top Plate Size L x W	 Fixed Bolt Plate Spacing Pitch
100 (4")	50 (2")	150x110	105x75	168	35	150x110	120x60
150 (6")	50 (2")	150x110	105x75	200	40	150x110	120x60
150 (4")	75 (3")	150x135	105x75	270	40	150x135	120x85
200 (8")	50 (2")	150x110	105x75	270	70	150x110	120x60
200 (4")	75 (3")	150x135	105x75	270	70	150x135	120x85
250 (10")	50 (2")	150x110	105x75	320	75	150x110	120x60
250 (10")	75 (3")	150x135	105x75	320	75	150x135	120x85
300 (12")	50 (2")	150x110	105x75	370	80	150x110	120x60
300 (12")	75 (3")	150x135	105x75	370	80	150x135	120x85
450 (18")	100 (4")		105x75	525	100		

Sl. No.	SIZE	 RED NY PVC	 WHITE SOLID NYLON	 BLACK SOLID UHMW	 PHENOLIC FIBRE	 ORANGE ANTI SKID	 WHITE NYLON 'E'	 CI PU RED FLAT	 RUBBER BONDED CI	 CASTING TAPPER	 RED CI PU	 CI CORE POLYURETHANE
1	100x50 mm	150	300	300	300	250	300	350	150	400	350	400
2	150x50 mm	225	500	600	400	350	500	650	200	700	500	550
3	150x75 mm	-	550	700	500	-	-	700	400	750	-	-
4	200x50 mm	250	600	800	600	400	550	800	300	850	550	600
5	200x75 mm	-	650	1000	650	-	-	850	500	900	-	-
6	250x50 mm	-	800	1100	900	-	-	950	400	1000	-	-
7	250x75 mm	-	900	1200	1000	-	-	1200	600	1250	-	-
8	300x50 mm	-	1000	1300	1000	-	-	1400	450	1500	-	-
9	300x75 mm	-	1100	1400	1100	-	-	1750	900	2000	-	-
10	450x100mm	-	1500	-	-	-	-	2200	1500	2500	-	-

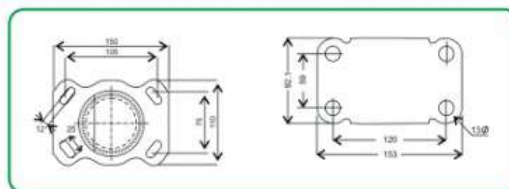

COLOUR OPTION : ZINC / BLACK / IVORY / GOLDEN



Manufactured by : **MECH ENGINEERING CORPORATION**

H.O. : Old # 158, (New # 325), Linghi Chetty Street, Chennai - 600 001.

Vegetarian Village, Vadaperumbakkam, Red Hills, Chennai - 600 060.

Warehouse : # 55/56, 3rd Line North Beach Road, Chennai - 600 001.

☎ 044-4768 6161 | 📞 98846 55253 | 📞 97899 94650 | 📞 98400 65253

✉ sales@rollwellcastors.com | meco786@hotmail.com

🌐 www.rollwellcastors.com

Manufacturer reserve the right to change the design for continuous development and improvement
All the load carrying capacity mentioned are in Kgs.



MECH
ENGINEERING CORPORATION
An ISO 9001 : 2015 Certified Company

Medical Castor



Medical Castor

Wheel Dia	Total Height	Load Capacity
75 mm	104 mm	35 Kgs
100 mm	127 mm	50 Kgs
125 mm	117 mm	50 Kgs
150 mm	170 mm	60 Kgs



Medical Castor Light Duty

Wheel Dia	Wheel Width	Total Height	Load Capacity
50 mm	22	82 mm	20 Kgs
75 mm	32	114 mm	80 Kgs
100 mm	32	138 mm	80 Kgs
125 mm	32	164 mm	80 Kgs
150 mm	32	180 mm	80 Kgs



Castor with ABS Cover

Wheel Dia	Wheel Width	Total Height	Load Capacity
75 mm	28	110 mm	30 kgs
100 mm	32	128 mm	40 kgs
125 mm	32	171 mm	55 kgs
150 mm	38	210 mm	70 kgs



Stretcher Trolley Castor

Wheel Dia	Wheel Width	Total Height	Load Capacity
75 mm	32	108 mm	50 Kgs
100 mm	32	132 mm	65 Kgs
125 mm	32	155 mm	65 Kgs
150 mm	32	182 mm	65 Kgs
200 mm	38	245 mm	80 Kgs

Assembled by : MECH ENGINEERING CORPORATION

H.O. : Old # 158, (New # 325), Linghi Chetty Street, Chennai - 600 001.

Vegetarian Village, Vadaperumbakkam, Red Hills, Chennai - 600 060.

Warehouse : # 55/56, 3rd Line North Beach Road, Chennai - 600 001.

☎ 044-4768 6161 | 📞 98846 55253 | 📞 97899 94650 | 📞 98400 65253

✉ sales@rollwellcastors.com | meco786@hotmail.com

🌐 www.rollwellcastors.com

Manufacturer reserve the right to change the design for continuous development and improvement
All the load carrying capacity mentioned are in Kgs.



Aluminium Levelling Castor

ROLLWELL
Trolley Wheel & Castors
MANUFACTURERS OF CASTOR & WHEELS



RW18-120F



RW18-1000F



RW18-80F



RW18-60F



RW18-40F



RW18-60H



RW18-60B

Model No.	Wheel Dia	Top Plate Size L x W	Bolt Hole Spacing (Pitch)	Overall Height	LCC Single Wheel	LCC Four Wheel
RW018-40F/S	40x19.2	55x65x3	42x42	75 + 8	50	200
RW018-60F/S	50x24	73x73x5	58x58	85 + 10	500	200
RW018-80F/S	62x30.7	90x90x5	70x70	110 + 12	750	3000
RW018-100F/S	75x32	95x95x5	70x70	120 + 12	1000	4000
RW018-120F/S	75x32	95x95x6	70x70	120 + 12	1000	4000

Levelling Castor Light



Model No.	Wheel Dia	Tread Width	Top Plate Size L x W	Bolt Hole Spacing (Pitch)	Bolt Hole Dia	Overall Height	LCC
RW07-A040PAP	40	27.5	66x48	48x32	8x6	58	70
RW07-A050PAP	50	30.5	75x54	54x36	9x7	68	100
RW07-A06SPAP	65	38.5	95x69	72x43	12x9	92	200
RW07-A07SPAP	75	45	105x80	82x60	11x9	105	300



Foot Locks

Model No.	Closed Height	Extended Height	Plate Size	Pitch	Eye Size	Capacity
FL - A	140 MM	170 MM	120 X 120 MM	93x93	10x20	120 kgs
FL - B	170 MM	205 MM	120 X 120 MM	93x93	10x20	170 kgs
FL - C	185 MM	222 MM	120 X 120 MM	93x93	10x20	200 kgs

Assembled : MECH ENGINEERING CORPORATION

H.O. : Old # 158, (New # 325), Linghi Chetty Street, Chennai - 600 001.

Vegetarian Village, Vadaperumbakkam, Red Hills, Chennai - 600 060.

Warehouse : # 55/56, 3rd Line North Beach Road, Chennai - 600 001.

☎ 044-4768 6161 | 📞 98846 55253 | 📞 97899 94650 | 📞 98400 65253

✉ sales@rollwellcastors.com | meco786@hotmail.com

🌐 www.rollwellcastors.com

Manufacturer reserve the right to change the design for continuous development and improvement
All the load carrying capacity mentioned are in Kgs.



MECH
ENGINEERING CORPORATION
An ISO 9001 : 2015 Certified Company

TRP RUBBER



Brown Rubber TPR

Model No.	Wheel Dia	Top Plate Size L x W	Bolt Hole Spacing (Pitch)	Eye Size	LCC Single Wheel	LCC Four Wheel
TPR-25	25x12	38x30	29x21	4	44	10
TPR-32	30x12	39x33	30x24	4	53	15
TPR-40	38x16	46x39	38x28	4	60	20
TPR-50	20x50	60x49	45x32	6x9	75	30
TPR-75	75x25	73x60	54x39	8x12	103	50



Grey Rubber TPR

Model No.	Wheel Dia	Top Plate Size L x W	Bolt Hole Spacing (Pitch)	Eye Size	Overall Height	LCC Four Wheel
GRTPR-75	75x32	95x65	73x45	12x8	105	90
GRTPR-100	100x32	95x65	73x45	12x8	130	100
GRTPR-125	125x32	95x65	73x45	12x8	155	130



ESD Wheels (Electrostatic Dissipative)

Model No.	Wheel Dia	Top Plate Size L x W	Bolt Hole Spacing (Pitch)	Eye Size	Overall Height	LCC Four Wheel
ESD-75	75x32	93x64	73x45	8.5x12	103 mm	100
ESD-100	100x32	93x64	73x45	8.5x12	157 mm	130
ESD-125	125x32	93x64	73x45	8.5x12	180 mm	150

Assembled by : **MECH ENGINEERING CORPORATION**

H.O. : Old # 158, (New # 325), Linghi Chetty Street, Chennai - 600 001.

Vegetarian Village, Vadaperumbakkam, Red Hills, Chennai - 600 060.

Warehouse : # 55/56, 3rd Line North Beach Road, Chennai - 600 001.

☎ 044-4768 6161 | 📞 98846 55253 | 📞 97899 94650 | 📞 98400 65253

✉ sales@rollwellcastors.com | meco786@hotmail.com

🌐 www.rollwellcastors.com

Manufacturer reserve the right to change the design for continuous development and improvement
All the load carrying capacity mentioned are in Kgs.



Platform Trolley Fibre



SPECIFICATIONS	MODEL NO. 150	MODEL NO. 350	MODEL NO. 600
CAPACITY	150	350	600
SIZE OF PLATFORM L X W	710 MM X 520 MM	900 MM X 600 MM	1070 MM X 650 MM
PLATFORM HEIGHT	110MM	135MM	155 MM
TOTAL HEIGHT WITH HANDLE	800 MM	890MM	890MM
WHEEL SIZE	75MM X 28MM	100MM X 28 MM	125 MMX 32 MM
NO OF WHEELS	4	4	5
WHEEL OPTIONS	2 NOS RIDGID + 2 NOS SW IVEL (OR BRAKE OPTIONAL)	2 NOS RIDGID + 2 NOS SW IVEL (OR BRAKE OPTIONAL)	2 NOS RIDGID + 2 NOS SW IVEL (OR BRAKE OPTIONAL)
WHEEL MATERIAL OPTION	NY PU,TPR, NYLON, UHMW	NY PU,TPR, NYLON, UHMW	NY PU,TPR, NYLON, UHMW
PLATFORM QUALITY	INJECTION MOULDED PLASTIC	INJECTION MOULDED PLASTIC	INJECTION MOULDED PLASTIC
HANDLE	MS GALVANISHED OR COATED FINISH	MS GALVANISED OR COATED FINISH	MS GALVANISED OR COATED FINISH
TROLLEY NET WEIGHT	10 KGS	12 KGS	18 KGS

Platform Trolley Steel

SPECIFICATIONS	MODEL NO. 150	MODEL NO. 350	MODEL NO. 600	MODEL NO. 750
CAPACITY	150	350	600	750
SIZE OF PLATFORM L X W	710 MM X 520 MM	900 MM X 600 MM	1070 MM X 650 MM	1250 MM X 800 MM
PLATFORM HEIGHT	110MM	135MM	155 MM	175 MM
TOTAL HEIGHT WITH HANDLE	800 MM	890MM	890MM	950MM
WHEEL SIZE	75MM X 28MM	100MM X 28 MM	125 MMX 32 MM	150 MMX 50 MM
NO OF WHEELS	4	4	5	5
WHEEL OPTIONS	2 NOS RIDGID + 2 NOS SW IVEL (OR BRAKE OPTIONAL)	2 NOS RIDGID + 2 NOS SW IVEL (OR BRAKE OPTIONAL)	2 NOS RIDGID + 2 NOS SW IVEL (OR BRAKE OPTIONAL)	2 NOS RIDGID + 2 NOS SW IVEL (OR BRAKE OPTIONAL)
WHEEL MATERIAL OPTION	NY PU,TPR, NYLON, UHMW	NY PU,TPR, NYLON, UHMW	NY PU,TPR, NYLON, UHMW	NY PU,TPR, NYLON, UHMW
PLATFORM QUALITY	MILD STEEL SHEET	INJECTION MOULDED PLASTIC	INJECTION MOULDED PLASTIC	INJECTION MOULDED PLASTIC
HANDLE	MS GALVANISHED OR COATED FINISH	MS GALVANISED OR COATED FINISH	MS GALVANISED OR COATED FINISH	MS GALVANISED OR COATED FINISH
TROLLEY NET WEIGHT	10 KGS	12 KGS	18 KGS	24 KGS

Assembled by : MECH ENGINEERING CORPORATION

H.O. : Old # 158, (New # 325), Linghi Chetty Street, Chennai - 600 001.

Vegetarian Village, Vadaperumbakkam, Red Hills, Chennai - 600 060.

Warehouse : # 55/56, 3rd Line North Beach Road, Chennai - 600 001.

☎ 044-4768 6161 | 📞 98846 55253 | 📞 97899 94650 | 📞 98400 65253

✉ sales@rollwellcastors.com | meco786@hotmail.com

🌐 www.rollwellcastors.com

Manufacturer reserve the right to change the design for continous development and improvement
All the load carrying capacity mentioned are in Kgs.



Hydraulic Hand Pallet Truck

ROLLWELL
Trolley Wheel & Castors
MANUFACTURERS OF CASTOR & WHEELS



Specification	Model No. 2000-550	Model No. 2000-685	Model No. 2500-550	Model No. 2500-685	Model No. 3500-550	Model No. 3500-685	Model No. 5000-685
Capacity	2000 kgs	2000 kgs	2500 kgs	2500 kgs	3500 kgs	3500 kgs	5000 kgs
Min Fork Height	90 mm	90 mm	90 mm	90 mm	90 mm	90 mm	90 mm
Max Fork Height	160 mm	160 mm					
Fork Length	1150 mm	1150 mm	1150 mm	1150 mm	1150 mm	1150 mm	1150 mm
Fork Width	160 mm	160 mm	160 mm	160 mm	160 mm	160 mm	160 mm
Overall Fork Width	550 mm	685 mm	550 mm	685 mm	550 mm	685 mm	685 mm
Overall Length	1525 mm	1525 mm	1525 mm	1525 mm	1525 mm	1525 mm	1625 mm
Overall Ht. with Handle	1220 mm	1220 mm	1220 mm	1220 mm	1220 mm	1220 mm	1220 mm
Turning Radius	1265 mm	1265 mm	1265 mm	1265 mm	1265 mm	1265 mm	1265 mm
Steering Wheel	180 mmx 50 mm	180 mmx 50 mm	180 mmx 50 mm	180 mmx 50 mm	180 mmx 50 mm	180 mmx 50 mm	180 mmx 50 mm
Load Roller	80 mm X70 mm	80 mm X70 mm	80 mm X70 mm	80 mm X70 mm	80 mm X70 mm	80 mm X70 mm	80 mm X70 mm
Wheel Quality	Nylon, Ci Pu, Ci	Nylon, Ci Pu, Ci	Nylon, Ci Pu, Ci	Nylon, Ci Pu, Ci	Nylon, Ci Pu, Ci	Nylon, Ci Pu, Ci	Nylon, Ci Pu, Ci
Nett Weight	76	82	76	85	80	90	125



Red CIPU

Nylon Fan

UHMW

ALUM Rubber

CI

Assembled by : MECH ENGINEERING CORPORATION

H.O. : Old # 158, (New # 325), Linghi Chetty Street, Chennai - 600 001.

Vegetarian Village, Vadaperumbakkam, Red Hills, Chennai - 600 060.

Warehouse : # 55/56, 3rd Line North Beach Road, Chennai - 600 001.

☎ 044-4768 6161 | 📞 98846 55253 | 📞 97899 94650 | 📞 98400 65253

✉ sales@rollwellcastors.com | meco786@hotmail.com

🌐 www.rollwellcastors.com

Manufacturer reserve the right to change the design for continous development and improvement
All the load carrying capacity mentioned are in Kgs.




MECH
ENGINEERING CORPORATION
An ISO 9001 : 2015 Certified Company

Scaffolding Castor Light



Wheel Dia	Width (mm)	Total Height	Load Capacity	Plate Thickness	Pipe Size ID	Pipe Length
125mm	50mm	180mm	100kg	3mm	55mm	100mm
150mm	50mm	215mm	150kg	3mm	55mm	100mm
200mm	50mm	240mm	200kg	3mm	55mm	125mm

Scaffolding Castor Medium

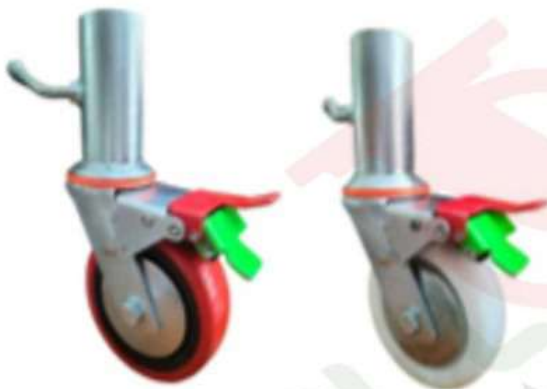

Wheel Dia	Width (mm)	Total Height	Load Capacity	Plate Thickness	Pipe Size ID	Pipe Length
125mm	50mm	180mm	150 kg	5mm	55mm	100mm
150mm	50mm	210mm	250kg	5mm	55mm	100mm
200mm	50mm	237mm	250kg	5mm	55mm	125mm



Scaffolding Castor Heavy



Wheel Dia	Width (mm)	Total Height	Load Capacity	Sheet Thickness
150mm	50mm	215mm	600kg	4mm
200mm	50mm	242mm	600kg	4mm

Manufactured by : **MECH ENGINEERING CORPORATION**

H.O. : Old # 158, (New # 325), Linghi Chetty Street, Chennai - 600 001.

Vegetarian Village, Vadaperumbakkam, Red Hills, Chennai - 600 060.

Warehouse : # 55/56, 3rd Line North Beach Road, Chennai - 600 001.

☎ 044-4768 6161 | 📞 98846 55253 | 📞 97899 94650 | 📞 98400 65253


✉ sales@rollwellcastors.com | meco786@hotmail.com

🌐 www.rollwellcastsors.com

Manufacturer reserve the right to change the design for continous development and improvement
All the load carrying capacity mentioned are in Kgs.



BALL TRANSFER

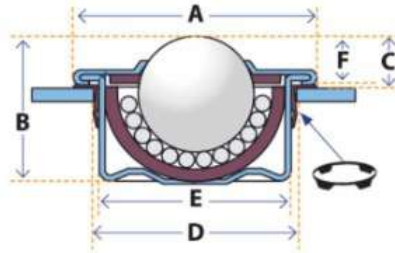

ROLLWELL
Trolley Wheel & Castors
MANUFACTURERS OF CASTOR & WHEELS

Model	Ball Dia	Loading	A	B	C	D	E	F	Mount Bote
	(mm)	Capacity	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(quantity-diameter)
RW-12F	12	10kg	40	7.8	7	22	28	3	2*Ø3.5
RW-16F	15.875	15kg	45	10	9	22	11	2.5	2*Ø4.5
RW-25F	25.4	30kg	71	14	16	40	55	3	2*Ø5.5
RW-30F	30	45kg	73	18	19	43	60	4	3*Ø5
RW-36F	38	55kg	95		28	55	80	6	3*Ø5

STRAIGHT TYPE TRANSPORT TROLLEY



Model	Rated Load	Safety Load	Wheel Material	No. of Wheels	LxWxH (MM)	G.W. (KG)
RW-6T	6 TONS	3 TON	RED CI PU WHEEL	4	300x215x110	15
RW-8T	8 TONS	4 TON	RED CI PU WHEEL	6	410x215x110	23
RW-12T	12 TONS	6 TON	RED CI PU WHEEL	8	495x215x110	30
RW-15T	15 TONS	7 TON	RED CI PU WHEEL	9	410x215x110	33
RW-18T	18 TONS	9 TON	RED CI PU WHEEL	12	495x295x110	40
RW-24T	24 TONS	12 TON	RED CI PU WHEEL	16	495x380x110	55
RW-32T	32 TONS	20 TON	RED CI PU WHEEL	20	623x415x110	59.4
RW-40T	40 TONS	25 TON	RED CI PU WHEEL	25	635x500x110	63.36

Wheel optional CI,NYLON, STEEL (MS)

Assembled by : **MECH ENGINEERING CORPORATION**

H.O. : Old # 158, (New # 325), Linghi Chetty Street, Chennai - 600 001.

Vegetarian Village, Vadaperumbakkam, Red Hills, Chennai - 600 060.

Warehouse : # 55/56, 3rd Line North Beach Road, Chennai - 600 001.

☎ 044-4768 6161 | 📞 98846 55253 | 📞 97899 94650 | 📞 98400 65253

✉ sales@rollwellcastors.com | meco786@hotmail.com

🌐 www.rollwellcastors.com

Manufacturer reserve the right to change the design for continous development and improvement
All the load carrying capacity mentioned are in Kgs.



MECH
ENGINEERING CORPORATION
An ISO 9001 : 2015 Certified Company

Low Height Castor



Model No.	Wheel Dia	Tread Width	Top Plate Size L x W	Bolt Hole Spacing (Pitch)	Eye Size	Overall Height	LCC
RLLH 40	40	27.50	66 x 48	48 x 32	8 x 6	58	70
RLLH 50	50	30.50	72 x 54	54 x 36	9 x 7	68	100
RLLH 63	63	38	95 x 69	72 x 43	12 x 9	92	200
RLLH 75	75	45	105 x 80	82 x 60	11 x 9	105	300
RLLH 100	100	50	105 x 80	82 x 60	11 x 9	125	500

Pneumatic Castor Wheel



Model No.	Wheel Dia	Tread Width	Top Plate Size L x W	Bolt Hole Spacing (Pitch)	Eye Size	Overall Height	LCC
PNEU 150	150	40	-	-	11 mm	-	100 kg
PNEU 200	200	50	-	-	11 mm	-	110 kg
PNEU 250	250	75	115x100	92x65	11 mm	257	150 kg
PNEU 400	400	100	115x100	92x65	11 mm	315	200 kg

V-U Groove Wheel



Model No.	Wheel Dia	Tread Width
GW 50	50	25
GW 50	50	32
GW 75	75	25
GW 75	75	32
GW 75	75	40
GW 100	100	25
GW 100	100	32
GW 100	100	40
GW 100	100	50
GW 125	125	32
GW 125	125	40
GW 150	150	40
GW 150	150	50
GW 200	200	40
GW 200	200	50

Manufactured by : **MECH ENGINEERING CORPORATION**

H.O. : Old # 158, (New # 325), Linghi Chetty Street, Chennai - 600 001.

Vegetarian Village, Vadaperumbakkam, Red Hills, Chennai - 600 060.

Warehouse : # 55/56, 3rd Line North Beach Road, Chennai - 600 001.

☎ 044-4768 6161 | 📞 98846 55253 | 📞 97899 94650 | 📞 98400 65253

✉ sales@rollwellcastors.com | meco786@hotmail.com

🌐 www.rollwellcastors.com

Manufacturer reserve the right to change the design for continuous development and improvement
All the load carrying capacity mentioned are in Kgs.



Pipe & Joints - Roller Track

ROLLWELL
Trolley Wheel & Castors
MANUFACTURERS OF CASTOR & WHEELS



Assembled by : **MECH ENGINEERING CORPORATION**

H.O. : Old # 158, (New # 325), Linghi Chetty Street, Chennai - 600 001.

Vegetarian Village, Vadaperumbakkam, Red Hills, Chennai - 600 060.

Warehouse : # 55/56, 3rd Line North Beach Road, Chennai - 600 001.

☎ 044-4768 6161 | 📞 98846 55253 | 📞 97899 94650 | 📞 98400 65253

✉ sales@rollwellcastors.com | meco786@hotmail.com

🌐 www.rollwellcastors.com

Manufacturer reserve the right to change the design for continous development and improvement
All the load carrying capacity mentioned are in Kgs.



MECH
ENGINEERING CORPORATION
An ISO 9001 : 2015 Certified Company

Spring Loaded Castor R-1000 SERIES


ROLLWELL
Trolley Wheel & Castors
MANUFACTURERS OF CASTOR & WHEELS



Wheel Dia	Tread Width	Top Plate Size L x W	Bolt Hole Spacing (Pitch)	Overall Height	Off Set	Eye Size	Fixed Top Plate Size L x W	Fixed Bolt Plate Spacing Pitch
100 (4")	50 (2")	160x115 mm	125x75 mm	160	45	25x13	160x115	125x75
150 (6")	50 (2")	160x115 mm	125x75 mm	210	50	25x13	160x115	125x75
200 (8")	50 (2")	160x115 mm	125x75 mm	260	75	25x13	160x115	125x75

Red NY PVC	Size	LCC	WHITE NYLON 'E'	Size	LCC	CI CORE POLYURETHANE	Size	LCC	ORANGE TREAD TYPE	Size	LCC
	100x50	200 kgs		100x50	250 kgs		100x50	300 kgs		100x50	225 kgs
	150x50	225 kgs		150x50	300 kgs		150x50	400 kgs		150x50	250 kgs
	200x50	250 kgs		200x50	350 kgs		200x50	450 kgs		200x50	275 kgs

RED CI PU	Size	LCC	RUBBER BONDED WHEEL	Size	LCC	NYLON IVORY	Size	LCC	CASTING TAPPER	Size	LCC
	100x50	250 kgs		100x50	200 kgs		100x50	250 kgs		100x50	350 kgs
	150x50	350 kgs		150x50	250 kgs		150x50	300 kgs		150x50	450 kgs
	200x50	400 kgs		200x50	275 kgs		200x50	350 kgs		200x50	550 kgs

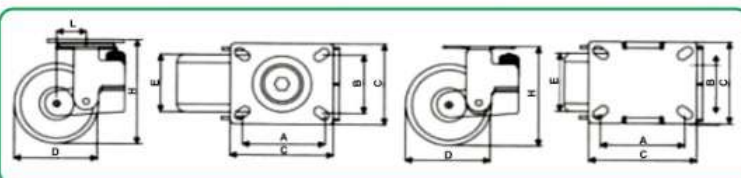

COLOUR OPTION : ZINC / BLACK / IVORY / GOLDEN



Manufactured by : **MECH ENGINEERING CORPORATION**

H.O. : Old # 158, (New # 325), Linghi Chetty Street, Chennai - 600 001.

Vegetarian Village, Vadaperumbakkam, Red Hills, Chennai - 600 060.

Warehouse : # 55/56, 3rd Line North Beach Road, Chennai - 600 001.

☎ 044-4768 6161 | 📞 98846 55253 | 📞 97899 94650 | 📞 98400 65253

✉ sales@rollwellcastors.com | meco786@hotmail.com

🌐 www.rollwellcastors.com

Manufacturer reserve the right to change the design for continous development and improvement
All the load carrying capacity mentioned are in Kgs.



MECH
ENGINEERING CORPORATION
An ISO 9001 : 2015 Certified Company